



SGM-E3.1-2409

$SUZUKA^{\circ}$ GRANI MULTICOLOR

3.1






SUZUKA® Grani Multicolor vs. Real Granite

Factors	Suzuka Grani Multicolor (SGC & SGM)	Real Granite	
Installation Time	Quick	Slow	
Installation Ease	Simple	Difficult & requires extensive set-up	
Installation Cost	Economical	Expensive	
Material Cost	Economical	Expensive	
Colour Control	Yes	No	
Environmental-Friendliness	Non-invasive & water-based	Environmentally invasive	
Safety	No risk	Risk of loosened stones falling	
Customization	Yes	No	
Maintenance	Economical and simple	Requires replacement & colour matching	

Advantages

- One-time, multi-colour spray system
- Colours and patterns can be customized
- Resistant to stains, fungus, algae, acid and alkali
- Washable and easy to maintain

- · High adhesion and anti-peeling/flaking
- Superb elasticity and is crack resistant
- Water-based and eco-friendly
- Excellent durability against weather conditions

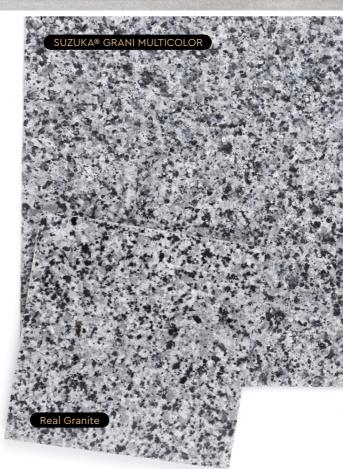




Superior primer for concrete, skimmed or masonry surfaces.

This sealer that has good substrate penetration abilities to increase adhesion of product to prevent chalking or peeling off.

It has excellent alkaline resistance properties that can prevent efflorescence. It is an ideal base coat for any SUZUKA® or any wall finish products.



eatures:

- Excellent alkaline resistance to prevent efflorescence.
- · Good for new walls and repainting.
- Prevents skim coat from chalking & peeling off.
- Extremely good penetration.
- Excellent adhesion.
- Exterior and interior use.
- Applicable with brush, roller or spray gun.

Suitable for:


- Masonry wall
- Brickwork
- Plaster
- Skimmed Coat
- Asbestos free substrate

Airless Spray		
Nozzle 1.8 - 2.0 mm	Spray Angle Degree 65° - 80°	Pressure 210 psi/150kg/cm²

Customized Colors Available.

SUZUKA® GRANILYTE

GRANITE EFFECT COATING

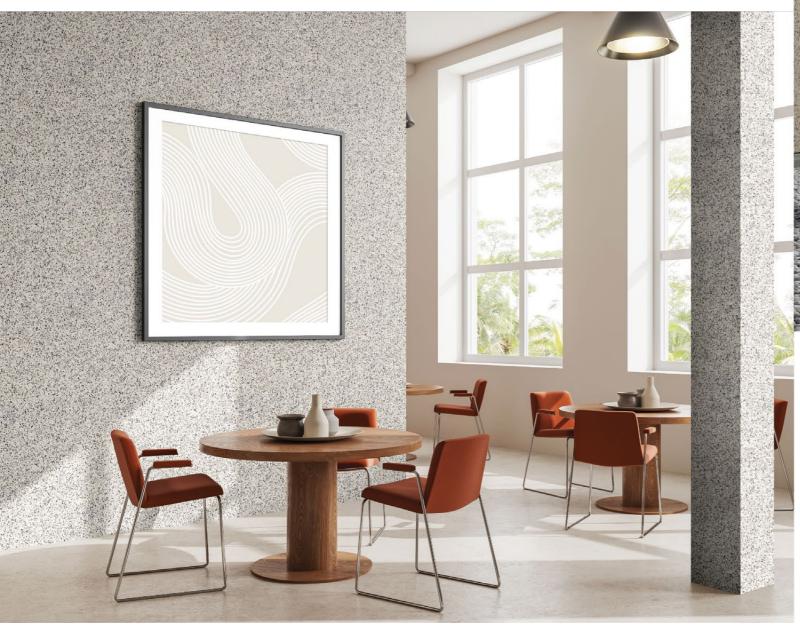


Introducing Granilyte, crafted to bring the timeless elegance and durability of natural granite look to your walls with ease. The meticulously formulated coating replicates the intricate natural beauty of granite.



SGC Application Process

Process	Material (Dilution)	Number of Coats	Time Interval Between Process	Consumption (±15%)	Tools	
1 Surface Preparation	Surface needs to be dry and free from dirt, oil, and foreign matter. Surface unevenness, including cracks, will need to be treated with cement filler.					
2 Primer	SGC - Sand Primer (Dilution: Max 3% with water)	2	4 hrs	7 - 9 m²/l/coat	Spray Gun, Roller or Brush	
3 Texture Coat	SGC Texture Coat (Dilution: Ready to use)	1 - 2	24 hrs	0.9 - 1.3 kg/m²	Spray Gun	
4 Top Coat	SGC Topcoat Satin (Dilution: Max 2% with water)	1	-	8 - 9 m²/l	Spray Gun, Roller or Brush	

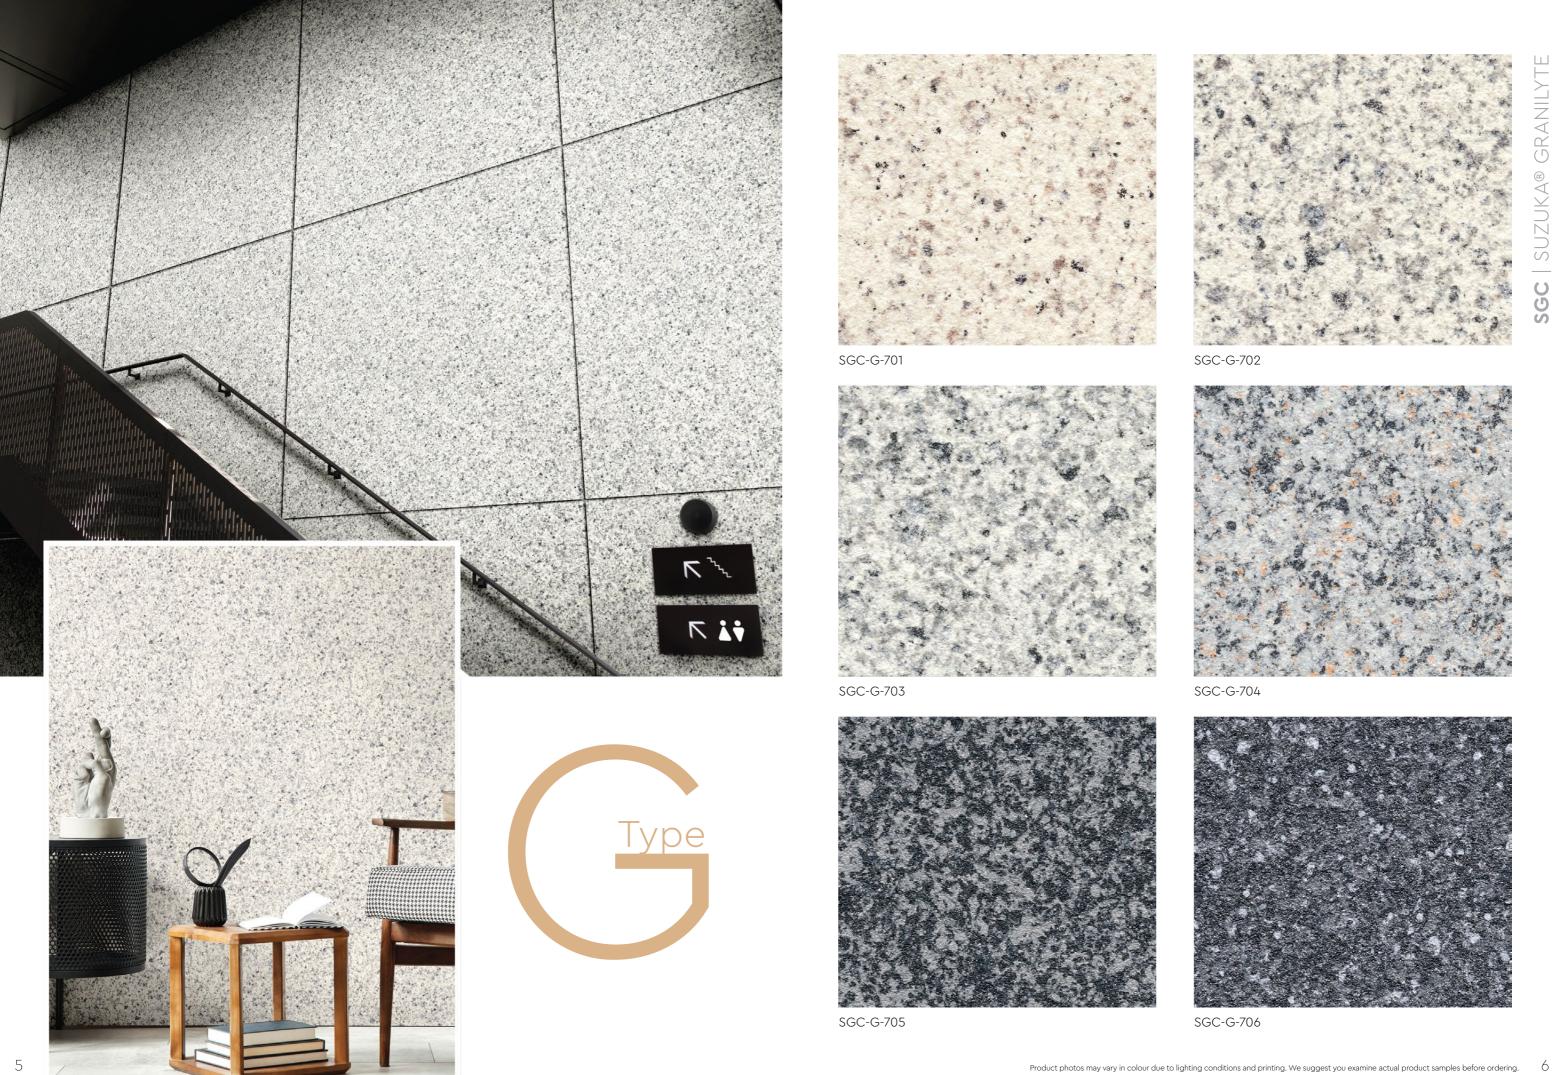



SGC-G-707




SGC-G-709



SGC-G-711



SGC-G-708



SGC-G-710

Customized Colors Available.



Product photos may vary in colour due to lighting conditions and printing.

We highly recommend seeing actual samples before ordering.





Customized Colors Available.



Product photos may vary in colour due to lighting conditions and printing.

We highly recommend seeing actual samples before ordering.



SGC-S-501



SGC-S-502








SGC-S-506



SGC-S-508





SGC-S-507



SGC-S-509

10

SUZUKA®


GRANITE EFFECT COATING

high-performance uses environmentally-friendly technology. water-based coating packages itself into individual capsules, allowing each to contain its own unique formula and colour.

This creates a one-time multi-colour spray system that is not only durable, but also effective in mirroring the authentic granite texture.

30M Application Flocess						
Process	Material (Mixing Weight Ratio)	Number of Coats	Time Interval Between Process	Consumption (±15%)	Tools	
1 Surface Preparation	Surface needs to be dry and free from dirt, oil, and foreign matter. Surface unevenness, including cracks, will need to be treated with cement filler.					
2 Primer	EM Primer : Water 100 : 0 - 5	1	4 hrs	7 - 9 m²/l	Spray Gun, Roller or Brush	
3 Texture Coating	SGM Body Coat : Water 100 : 0 - 5	1	24 hrs	3 - 3.5 kg/m²	Spray Gun	
	SGM Base Color : Water 100 : 0 - 2	2	4 hrs	6 - 7 m²/l	Spray Gun, Roller or Brush	
	SGM Texture Coat	1 - 2	24 hrs	0.5 - 0.8 kg/m²	Spray Gun	
4 Top Coat	SGM Topcoat Satin: Water 100 : 0 - 2	1	-	8 - 9 m²/l	Spray Gun, Roller or Brush	



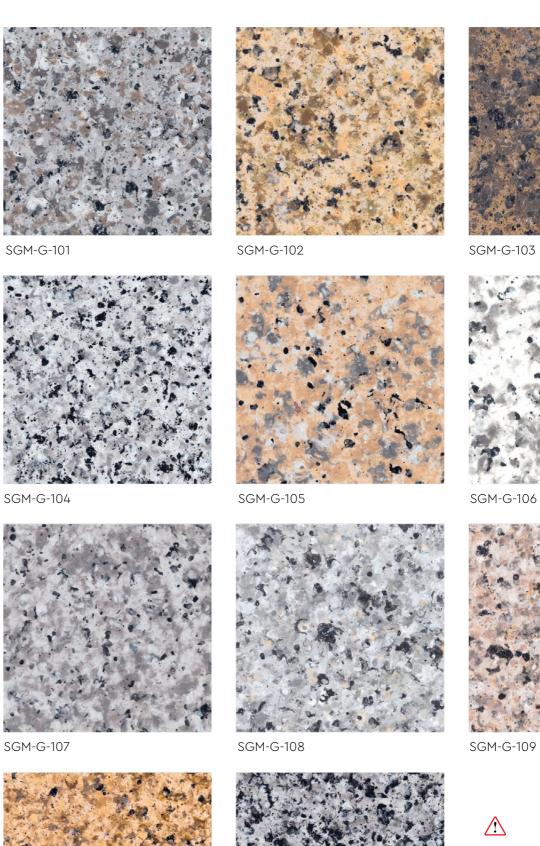

SGM-G-111



Product photos may vary in colour due to lighting conditions and printing.

We highly recommend seeing actual samples before ordering.












SGM-G-118







SGM-G-113



SGM-G-116




SGM-G-119




SGM-G-122



SGM-G-114



SGM-G-117





SGM-G-120




Product photos may vary in colour due to lighting conditions and printing.


We highly recommend seeing actual samples before ordering.

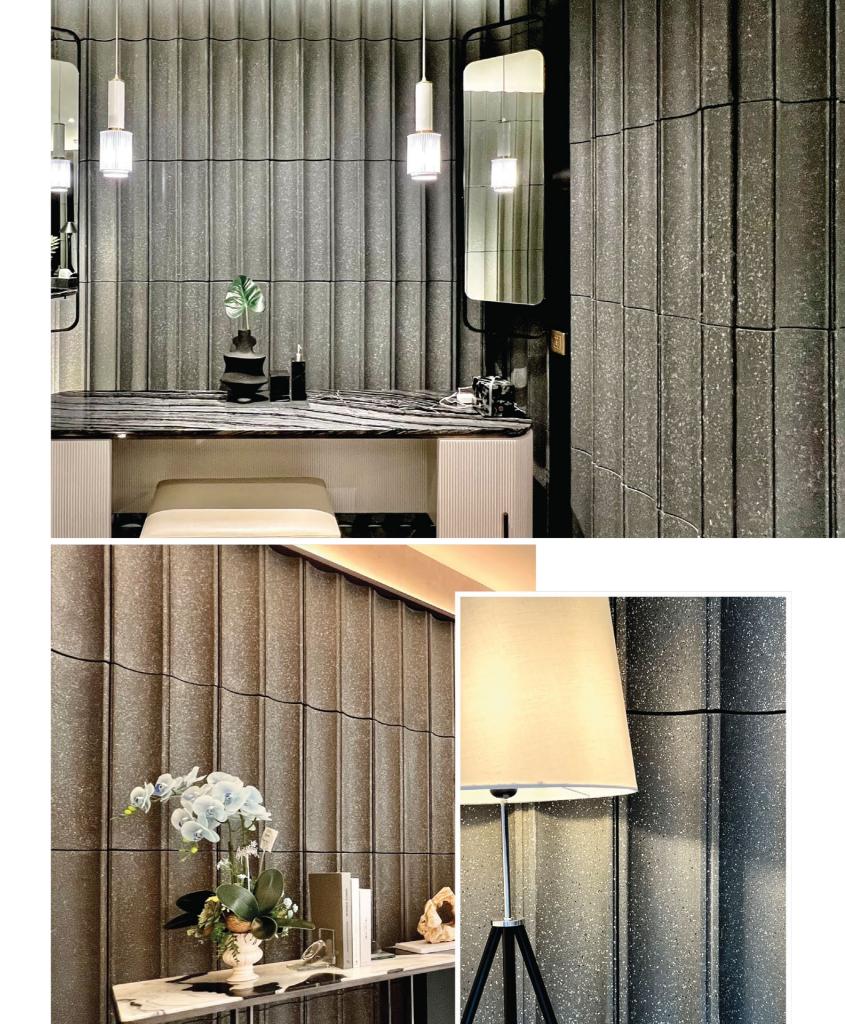


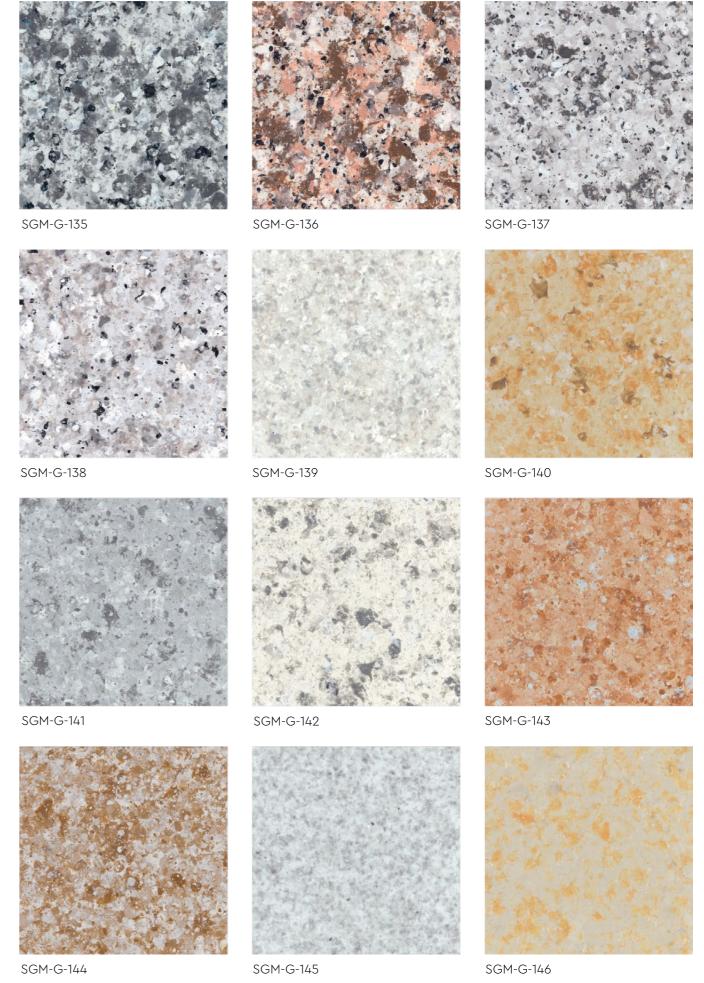


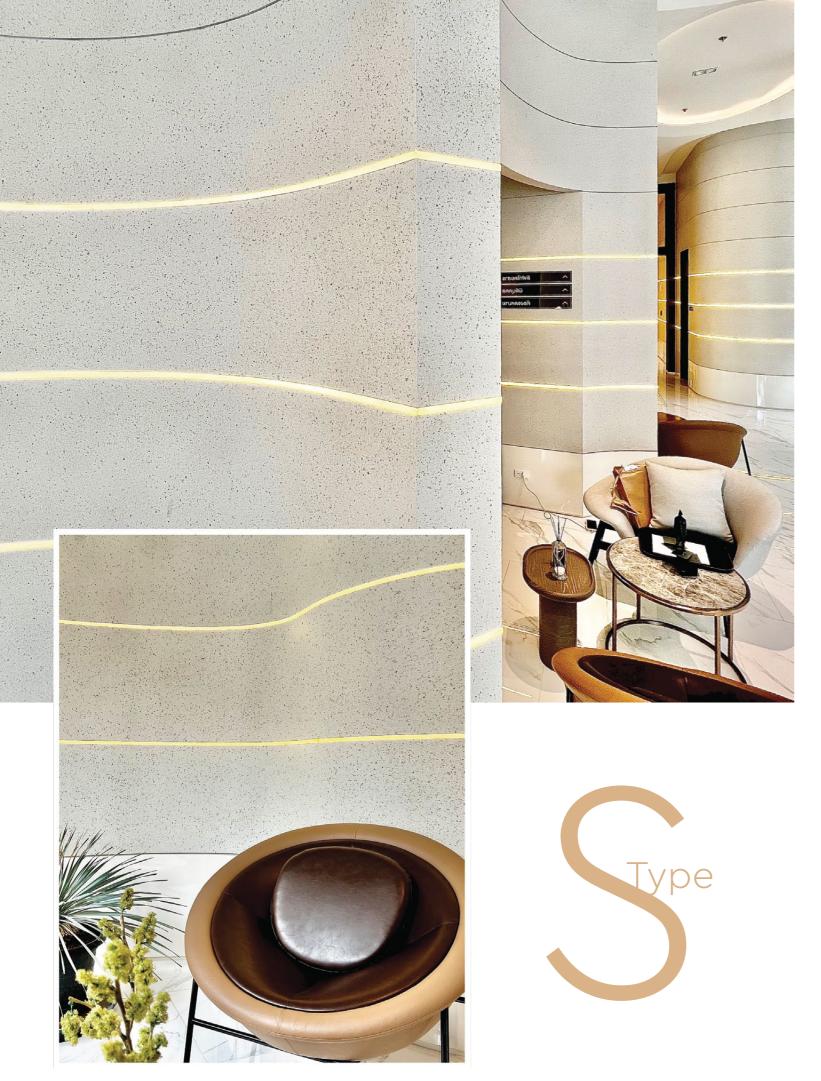














SGM-S-306





